Multi Disc Couplings

KAM

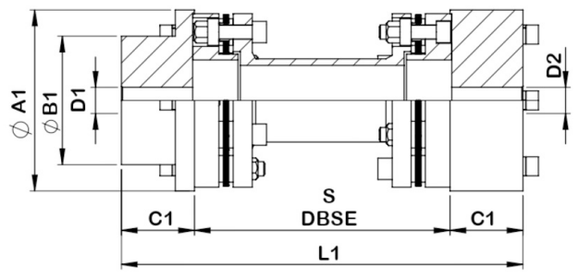

HUB TYPE - I HUB TYPE - II

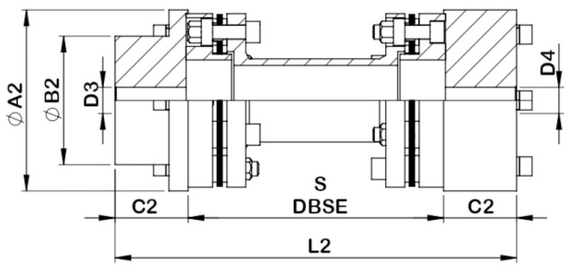

HUB TYPE - III HUB TYPE - IV

KAM - 8 TO 1880

Dimensions & Technical Data

Size	Kw @ 100 Rpm	Rated Torque (Nm)	Max. Speed Rpm	Dimensions (mm)																Min. DBSE Appx. Weight (Kg)
				Bore Range						Ø A1	Ø A2	Ø B1	Ø B2	C1	C2	Min. DBSE 'S'	DBSE 'S'	L1	L2	
				Min.		Max.														
				D1/ D2 Type I/II	D3/ D4 Type III/ IV	D1 Type I	D2 Type II	D3 Type III	D4 Type IV											
8	1.0	96	7500	8	10	24	42	38	48	69	90	40	55	30	40	80	100 140 180	160 200 240	180 220 260	1.4
25	2.5	230	7000	10	15	38	48	48	72	90	108	55	70	40	45	90		180 220 260	190 230 270	3.0
65	6.5	620	6000	15	20	48	72	65	92	108	135	70	86	45	55	100	140 180 250	230 270 340	250 290 360	6.3
125	12.5	1200	5200	20	25	65	92	80	102	135	152	86	108	55	60	125		250 290 360	260 300 370	12.5
165	20.0	1912	4800	25	30	80	102	90	120	152	182	108	130	60	70	145	180 250	300 370	320 390	19.5
370	36.0	3460	4400	30	45	90	120	108	140	182	197	130	158	70	90	160		320 390	360 430	31.5
390	58.5	5580	4200	45	55	108	140	127	155	197	225	158	181	90	95	175		360 430	370 440	49.0
790	74.0	7082	4000	55	65	127	155	140	178	225	250	181	206	95	105	180		370 440	390 460	69.5
1025	108.5	10380	3800	65	70	140	178	155	192	250	275	206	223	105	115	195	250	460	480	98.0
1425	152.0	14535	3700	70	75	155	192	170	212	275	300	223	248	115	130	210		480	510	127.3
1880	196.0	18710	3600	75	80	170	212	190	255	300	375	248	280	130	145	225		510	540	172.3

For the higher sizes please contact us
Weight may be differ as per DBSE
Non standard DBSE as per customer request.
Hubs selection available I/I, I/II, II/II, III/III, III/IV, IV/IV, API option 610/671 available on request
In view of our constant endeavour to improve quality of our products, we reserve the right to alter or change specifications without prior notice

Material Specifications

Hub	All Size	IS 1570
Spacer	All Size	IS 1570
Disc Plate	All Size	IS 1570
Bolts	All Size	High Tensile
Disc Pack	All Size	SS 301/304

*Other options are also available in material specifications on request